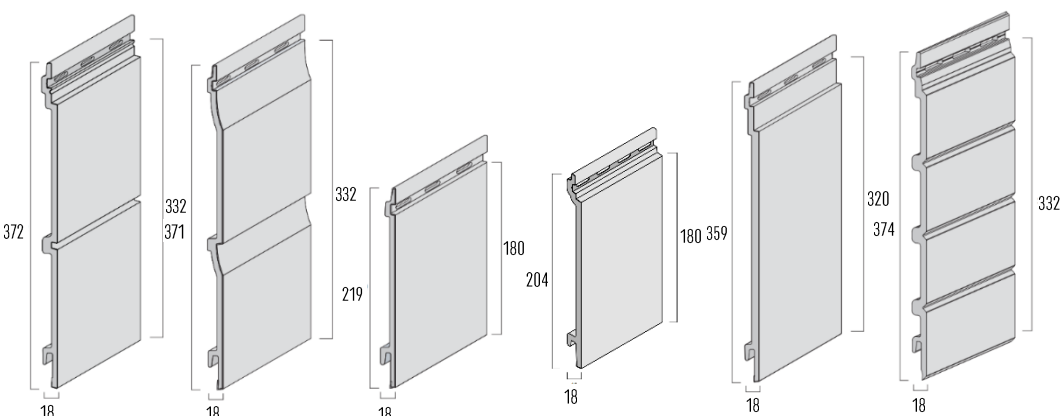


# KERRAFRONT

## TECHNICAL DATA SHEET

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Profile type           |  <p>FS-302 Double board</p> <p>FS-202 Double board</p> <p>FS-201 Single board</p> <p>FS-101 Single board easyJoin</p> <p>FS-301 Single board</p> <p>FS-304 Fourfold board</p>                                                                                                                                                                                                                                                                                                           |
| Material               | PVC-UE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Weight                 | FS-101 – 0,82 kg/mb<br>FS-201 – 0,99 kg/mb<br>FS-202 – 1,58 kg/mb<br>FS-301 – 1,88 kg/mb<br>FS-302 – 1,75 kg/mb<br>FS-304 – 1,73 kg/mb                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Total width / coverage | FS-101 – 204/180 mm<br>FS-201 – 219/180 mm<br>FS-202 – 371/332 mm<br>FS-301 – 359/320 mm<br>FS-302 – 372/332 mm<br>FS-304 – 374/332 mm                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Thickness              | FS-101 – 6,9 – 18 mm<br>FS-201 – 6,9 – 18 mm<br>FS-202 – 6,9 – 18 mm<br>FS-301 – 8,7 – 18 mm<br>FS-302 – 6,9 – 18 mm<br>FS-304 – 6,9 – 18 mm                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Packing                | FS-101 (2.40 m - EJ) – 2 pc. / 0.864 m <sup>2</sup><br>FS-101 (2.95 m - EJ) – 4 pc. / 2.124 m <sup>2</sup><br>FS-201 (2.95 m CX) – 2 pc. / 1.062 m <sup>2</sup><br>FS-201 (6 m) – 2 pc. / 2.160 m <sup>2</sup><br>FS-202 (6 m) – 2 pc. / 3.960 m <sup>2</sup><br>FS-301 (2.95 m CX) – 2 pc. / 1.888 m <sup>2</sup><br>FS-301 (6 m) – 2 pc. / 3.840 m <sup>2</sup><br>FS-302 (2.95 m CX) – 2 pc. / 1.959 m <sup>2</sup><br>FS-302 (6 m) – 2 pc. / 3.984 m <sup>2</sup><br>FS-304 (2.95 m CX) – 2 pc. / 1.959 m <sup>2</sup><br>FS-304 (6 m) – 2 pc. / 3.984 m <sup>2</sup> |

|                                    |                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Storage                            | Profiles made of foamed PVC should be stored indoors, on a dry, flat and stable base, ensuring no direct contact with the ground. While remaining in their packaging, they should not be stored in places where they can be exposed to direct sunlight.                                                                                                                                  |
| Tools                              | Conventional carpentry tools for cutting or drilling should be used for processing foamed PVC profiles and finishing strips. Use fine-toothed saws; mechanical tools for processing should be used at the same or faster speeds as for processing wood.                                                                                                                                  |
| Fastening                          | Screws - according to the installation instructions.                                                                                                                                                                                                                                                                                                                                     |
| Factory mounting holes             | Yes. Oblong holes for mechanical fasteners.                                                                                                                                                                                                                                                                                                                                              |
| Installation temperature           | Installation should take place at an ambient temperature between + 5°C and + 30°C. Before installation, the profiles should be able to adapt to the weather conditions at the installation site for about 24 hours                                                                                                                                                                       |
| Important installation information | See assembly instructions.                                                                                                                                                                                                                                                                                                                                                               |
| Maintenance                        | Facade profiles made of foamed PVC are ready-made products that do not require painting and maintenance. In order to maintain aesthetics, the facades should be cleaned at least once a year or depending on how dirty it is. Use mild detergents. Do not use water at a temperature above + 40°C, strong detergents, bleaching agents, solvents, strong acids and bases, and abrasives. |
| Usage Information                  | During product use, colour changes due to solar radiation may occur in the time specified depending on the geographical location of the installed product, not exceeding grey scale step 3, per EN 20105-A02.                                                                                                                                                                            |

| Essential characteristics       | Performance properties                      | Assessment methods                                 |
|---------------------------------|---------------------------------------------|----------------------------------------------------|
| Impact resistance               | Not less than:<br>3J (-20,03)<br>6J (23,06) | PN-EN 13245-2:2009/AC:2010                         |
| Release of hazardous substances | NPD                                         | -                                                  |
| Reaction to fire                | D-s3;d2                                     | PN-EN 13501-1:2019-02                              |
| Durability (Collection):        |                                             | PN-EN 13245-2:2009/AC:2010                         |
| WOOD EFFECT / TREND EFFECT      | A.20.60                                     |                                                    |
| TREND STONE                     | A.4.60                                      |                                                    |
| TREND SOFT                      | A.6,4.60                                    |                                                    |
| OPTI PAPER / CHISELED           | A.6,4.60                                    |                                                    |
| MODERN WOOD / CLASSIC           | A.6,4.60                                    | PN-EN 20105-A02:1996<br>PN-EN 13245-2:2009/AC:2010 |
| Color change:                   | Greyscale not more than 3                   |                                                    |
| Fastening strength              | See: assembly instructions                  |                                                    |



WOOD-BASED  
STRUCTURE



MOISTURE RESISTANT




IMPACT RESISTANT



IDEAL COVER OF THE  
FACADE INSULATION



QUICK AND EASY  
INSTALLATION



100% RECYCLING